



# Gateway 600YG2 Keyboard Replacement

Removal of keyboard

Written By: Elizabeth Mazer



## INTRODUCTION

How to remove keyboard.


---



### TOOLS:

- [Phillips #0 Screwdriver](#) (1)
  - [Spudger](#) (1)
-

## Step 1 — Battery

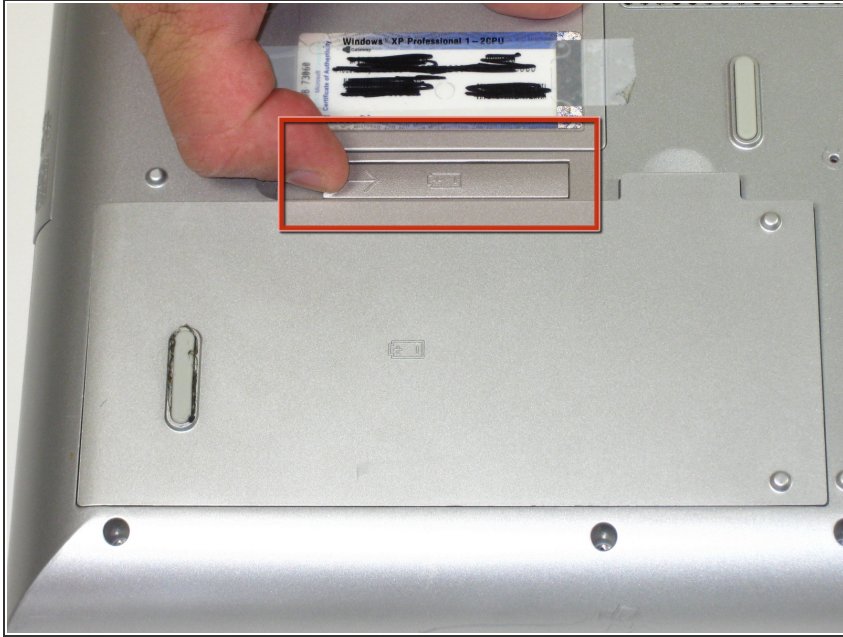

- Flip the laptop over. Slide the battery release tab to the right.

## Step 2



- Lift the battery out.




## Step 3 — Power button panel




- Insert spudger between sysrq and ins keys.
- Gently lift power button panel from the right to left.

## Step 4 — Keyboard

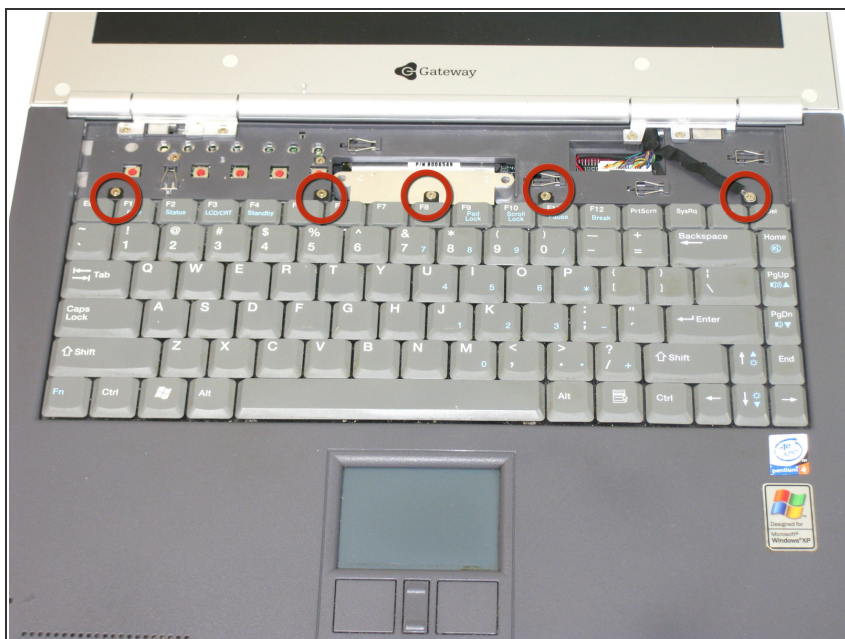

- Remove the 5 screws holding the keyboard in place.

## Step 5

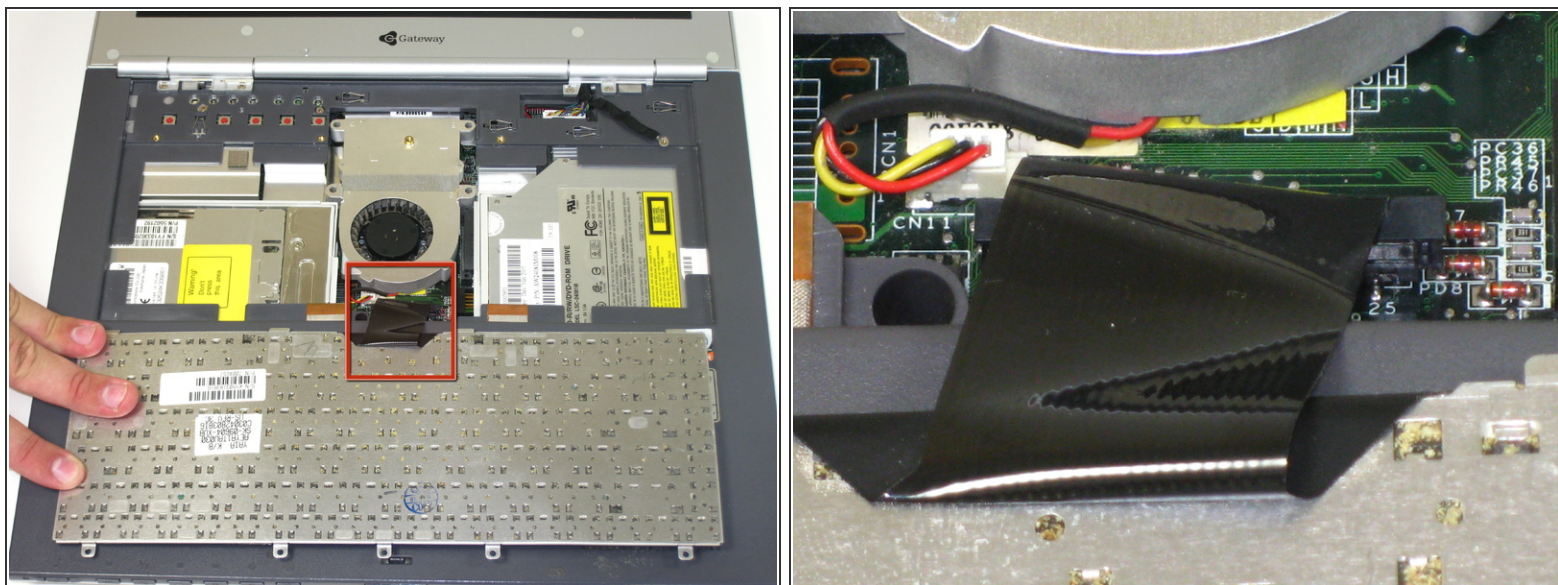

- ⚠ CAUTION: When lifting the keyboard out, do not lift keyboard up. Only fold back along the space bar edge.
- ⚠ DO NOT PULL the black cable by the ribbon section; only pull it by the connector itself.
  - Follow the black ribbon cable to the connector and gently pull straight up.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-02 01:49:31 PM.